



ME7059



ME7059 EIGHT DRIVERS BOARD

AS9100C & ISO 9001:2008 Certified


Function

The ME7059 is a board connecting 8 LE PGX drivers to one 8- channel driver.

Three Terminal Groups

1. Power connection (marked as +V, +V, GND, GND)

- ▶ This is the power connector, which can carry the total current of all drivers. You **must** use proper gauge wires, properly finished (with ferrules), and properly torqued.
- ▶ If the total current (sum of all HI parameters) is higher than 10A both +V +V and both GND GND terminals must be used.
- ▶ A properly sized fuse or circuit breaker must be used for overload or a short circu

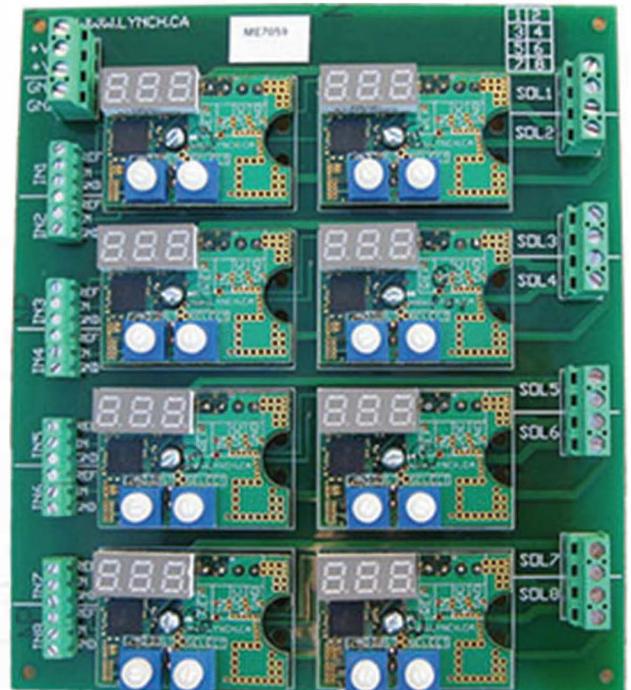

2) Control connections (marked as IN1...IN8)

- ▶ Each driver has 3 wires control input: REF, IN and GND.
- ▶ Please refer to LEPGX manual for wiring diagrams.

3) Solenoid connections marked as SOL1...SOL8

A diagram is located at the top right corner of the board which shows driver 1-8's location.

Contact Us For More Information

Local & International
P 1 (905) 363-2400
F 1 (905) 363-1191

Toll Free
P 1 (888) 626-4365
F 1 (800) 263-5807

Online
www.Lynch.ca
sales@lynch.ca

Canada
1799 Argentia Road
Mississauga, Ont.
L5N 3A2

USA
3790 Commerce Court
Suite 500, North
Tonawanda, NY, 14120