

**Faster**  
easier to connect.

Product Overview



---

With more than 60 years of experience in the hydraulic industry, Faster has designed and manufactured over 500 million quick-release couplings and has registered more than 80 patents.

Our product portfolio entails several solutions, grouped into 3 main areas: single couplings, castings and cartridges, and MultiFaster.

Our offer covers several areas of application, including Agriculture, Construction Equipment, High Pressure and Industrial.

Thanks to their high-level technology, our products can easily answer various market requests and meet specific requirements, set by the international standards and by different manufacturers.

---

## **Agriculture** \_\_\_\_\_ **3**

- Sleeve Retraction
- Push-Pull
- High Flow
- MultiFaster for Front Loaders
- MultiFaster for Harvesting

## **Construction Equipment** \_\_\_\_\_ **11**

- Screw to connect
- Flat Face
- MultiFaster

## **Industrial & Other Applications** \_\_\_\_\_ **19**

- ISO 7241-B
- Flat Face
- MultiFaster for Industrial Applications
- Oil & Gas
- BOP
- Refrigeration
- High Pressure
- Ultra High Pressure
- MultiFaster for High Pressure
- Check Valves and diagnostic

---

# Agriculture

---

Agriculture is the leading field of application for quick-release hydraulic couplings. Faster has developed a full range of products, covering all the hydraulic connections on regular tractors, both on rear hydraulic lines and front loaders. Moreover, we have selected products specifically designed for harvesting applications.



- **SLEEVE RETRACTION**
- **PUSH-PULL**
- **HIGH FLOW**
- **MULTIFASTER FOR FRONT LOADERS**
- **MULTIFASTER FOR HARVESTING**

# Sleeve Retraction




## NV



Male and Female couplings with poppet valve shut-off system. Size 1/2" interchangeable according to ISO 7241 Part A. Flow rate @ 0.2 MPa: 75 l/min.

### Accessories and spares

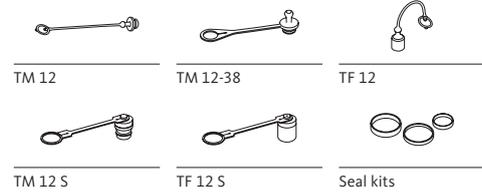


## CPV



Female couplings designed for panel mounting installation and connection to flexible hoses. Wide range of threaded adapters available. Size 1/2". Interchangeable according to ISO 7241 Part A. Flow rate @ 0.2 MPa: 75 l/min.

### Accessories and spares

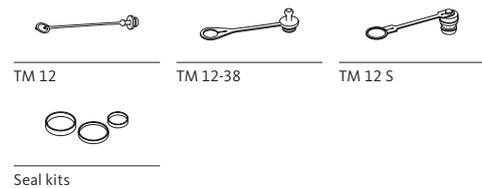


## 3CPV



Female couplings designed for panel mounting installation and connection to flexible hoses. Connectable with Male under residual pressure. Size 1/2". Interchangeable according to ISO 7241 Part A. Flow rate @ 0.2 MPa: 75 l/min. Breakaway function.

### Accessories and spares

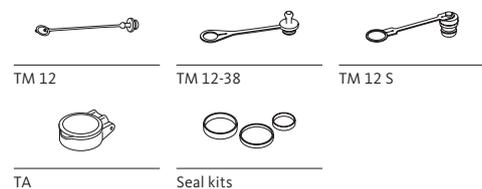

# Push-Pull




## 3CFPV



Push-Pull Female couplings connectable with Male under residual pressure. Can be screwed directly into valve ports or rigid pipes. Size 1/2". Interchangeable according to ISO 7241 Part A. Flow rate @ 0.2 MPa: 70 l/min. Breakaway function.

### Accessories and spares

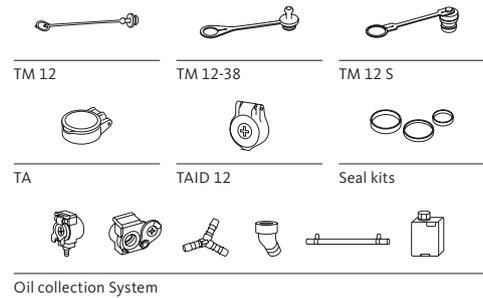


## 4SRPV



Push-Pull Female couplings, connectable under residual pressure in both Male and Female side. Can be screwed directly into valve ports or rigid pipes. Size 1/2". Interchangeable according to ISO 7241 Part A. Flow rate @ 0.2 MPa: 70 l/min. Breakaway function.

### Accessories and spares

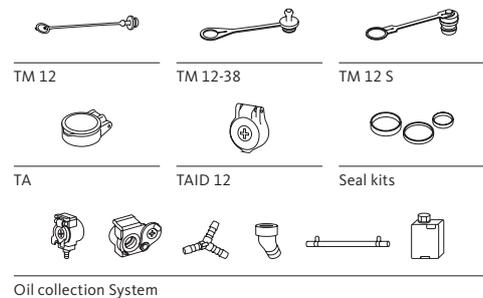


## 6DNPV



Push-Pull Female couplings for rigid mounting connectable with Male and Female under pressure, disconnectable under pressure with low effort. Equipped with one or two oil collecting ports to collect clean oil and reduce spillage. Size 1/2". Interchangeable according to ISO 7241 Part A. Flow rate @ 0.2 MPa: 50 l/min.

### Accessories and spares

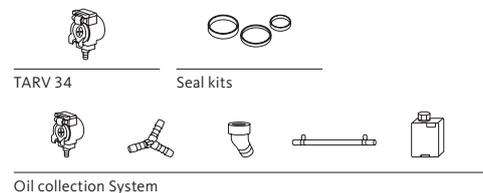

# HF High Flow



## 3CFHF



Male and Female Push-Pull couplings for agriculture connectable with Male under residual pressure. Size 1/2". Interchangeable according to ISO 7241 Part A. Maximum flow rate: 250 l/min. Breakaway function.



### Accessories and spares



TM 12



TM 12-38



TA



TM 12 S



TAID 12



Seal kits



Oil collection System



## 4SRHF



Male and Female Push-Pull couplings for agriculture connectable under residual pressure in both Male and Female side. Size 1/2". Interchangeable according to ISO 7241 Part A. Maximum flow rate: 250 l/min. Breakaway function.



### Accessories and spares



TM 12



TM 12-38



TA



TM 12 S



TAID 12



Seal kits



Oil collection System





## 3CKHF



Male and Female compact Push-Pull couplings for agriculture connectable with Male under residual pressure. Size 1/2". Interchangeable according to ISO 7241 Part A. Maximum flow rate: 250 l/min. Reduced dimensions: 15 mm shorter. Breakaway function.



### Accessories and spares



TM 12



TM 12-38



TA



TM 12 S



TAID 12



Seal kits



Oil collection System



## 4SKHF



Male and Female compact Push-Pull couplings for agriculture connectable under residual pressure in both Male and Female side. Size 1/2". Interchangeable according to ISO 7241 Part A. Maximum flow rate: 250 l/min. Reduced dimensions: 15 mm shorter. Breakaway function.



### Accessories and spares



TM 12



TM 12-38



TA



TM 12 S



TAID 12



Seal kits



Oil collection System



# MultiFaster for Front Loader



On [fastercouplings.com](http://fastercouplings.com) you can find the complete range of MultiFaster for front loader applications. Below some insights.

## P608



MultiFaster 6 lines, size o8. Possible to mount 2 electrical connectors. Working Pressure: 25 MPa. Flow rate @ 0.2 MPa: 70 l/min.

### Accessories and spares



KIT3FN



KIT2FN



Seal kits

## P506-X



MultiFaster 5 lines. 4 lines o6 and 1 line o8. Line o8 can be replaced by an electrical connector. Working Pressure: 25 MPa. Flow rate @ 0.2 MPa: 4 lines 40 l/min, 1 line 70 l/min.

### Accessories and spares



KIT3FN



KIT2FN



Seal kits

## PS06



MultiFaster 4 lines, size o6. Working Pressure: 25 MPa. Flow rate @ 0.2 MPa: 40 l/min.

### Accessories and spares



KIT3FN



KIT2FN



Seal kits

# MultiFaster for Harvesting



## PLK



MultiFaster 5 lines. 2 lines size o6, 3 lines size o9, 1 housing for electrical connector. Working pressure 25 MPa. Flow rate @ 0.2 MPa: 2 lines 20 l/min, 3 lines 35 l/min.

### Accessories and spares



KIT3FFP



KIT 2FFB



Seal kits

## PLV



MultiFaster 5 lines. 3 lines size o6, 2 lines size o9, 1 housing for electrical connector. Working pressure 22 MPa. Flow rate @ 0.2 MPa: 3 lines 20 l/min, 2 lines 35 l/min.

### Accessories and spares



KIT3FFP



KIT 2FFB../C



Seal kits

## P5065



MultiFaster 5 lines. 3 lines o4, 2 lines o6. Working pressure 25 MPa. Flow rate @ 0.2 MPa: 3 lines 20 l/min, 2 lines 40 l/min.

### Accessories and spares



KIT3FN



KIT2FN



Seal kits



---

# Construction Equipment

---

Construction Equipment is a challenging field of application for quick-release hydraulic couplings, where couplings must perform in tough environmental conditions, due to dust, mud, vibrations, temperature and pressure peaks. Faster has developed several solutions for the CE market, including Flat Face couplings, to avoid any leakage, Screw-to-Connect couplings, robust and reliable, and Casting solutions, to ensure the connection of multiple lines with decompression feature.



- SCREW TO CONNECT
- FLAT FACE
- MULTIFASTER

# Screw to Connect



## VVS



Screw-to-Connect Male and Female couplings, suitable for applications characterized by high working pressures and peaks. Safe and reliable thanks to the heavy duty internal components. Available sizes: 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2".

### Accessories and spares



TMV .../TMVM ...



TFP .../TFV .../TFVM ...



TFV ...



TMV ...



Seal kits

## CVV



Screw-to-Connect Male and Female couplings, suitable for general purpose applications. High resistance to pressure and flow impulses. Connectable under residual pressure. Available sizes: 1/4", 3/8", 1/2", 3/4", 1", 1-1/2". Interchangeable according to ISO 14541 standard only for sizes 1/4", 3/8", 1/2", 3/4".

### Accessories and spares



TMVV ...



TFVV ...



TMVV ...



TFVV ...



Seal kits

## CVLS



Screw-to-Connect Male couplings, suitable for general purpose applications. High resistance to pressure and flow impulses. Equipped with an additional safety sleeve to prevent accidental disconnections provoked by vibrations. Connectable under residual pressure. Available sizes: 1/2" and 1". Size 1/2" interchangeable according to ISO 14541 standard.

### Accessories and spares



TFVV ...



TFVV ...S



## FHV



Screw-to-Connect Flat Face couplings, suitable for heavy duty applications. Equipped with a safety sleeve to help preventing accidental disconnections due to vibrations. Equipped with a clear and intuitive visual check system, confirming the connection has occurred (green ring) or not (red ring). No hose torsion during connection and disconnection thanks to the internal bearing system. The Zinc-Nickel plating guarantees a remarkable resistance to corrosion. Thanks to its peculiar design, FHV couplings can also be connected and disconnected entirely by hand, without any tools. Connectable with residual pressure in the Male half up to 35 MPa. Working Pressure up to 53 MPa and flow rate up to 1000 l/min. Available sizes: 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2".

### Accessories and spares



TM FHV ...



TF FHV



Seal kits

## Easy to replace o-ring



The shaped seal with the preassembled o-ring is supplied with the SK FHV kit. Its material has an excellent elastic memory, to perfectly regain its original shape and fit into the groove when replaced.




**This product is safe, reliable and completely user-friendly. In case of aging or damage, the internal o-ring can be easily replaced by hand by following these simple instructions. This effortless manoeuvre will make your FHV last longer and perform even better.**

### Remove


1

Fix the male part. Retract the valve with the help of a non-sharp tool.




2

Remove the damaged seal and the o-ring with the help of a hook and pick tool.



3


Thoroughly clean the groove.



### Replace


4

After lubricating, insert the seal with the pre-assembled o-ring into the groove.




5

Ensure that all the components are perfectly aligned within the groove.



6

Release the valve.



# Flat Face




## FFH



Flat face Male and Female couplings. The flat valve shut-off system prevents contamination and spillage. Real maximum working pressure of 35 MPa and Zinc-Nickel plating. Available sizes: 1/8", 1/4", 3/8", 1/2", 5/8", 3/4", 1". Interchangeable according to ISO 16028. Size 1/8" has surface treatment in Mate 500 (CrIII) and it is not ISO interchangeable.

### Accessories and spares

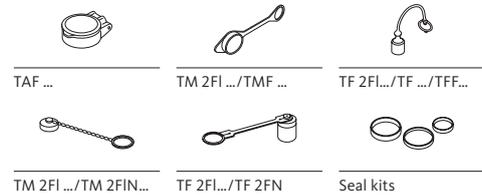


## 3FFH



Flat face Male and Female couplings. The flat valve shut-off system prevents contamination and spillage. Real maximum working pressure of 35 MPa and Zinc-Nickel plating. Connectable under residual pressure. It is possible to couple either a 3FFH Female half under pressure with a FFH Male half, or a 3FFH Male half under pressure with a FFH Female half. Available sizes: 3/8", 1/2", 5/8", 3/4". Interchangeable according to ISO 16028.

### Accessories and spares

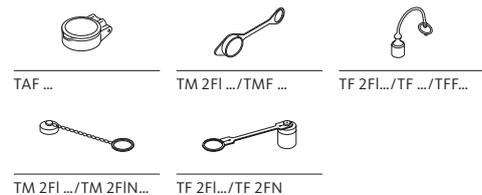

## FSH



Flat face Female couplings, equipped with sector latching technology. The sector latching system enables to effectively tackle the Brinelling effect, provoked by high frequency impulse pressures.

Real maximum working pressure of 35 MPa and Zinc-Nickel plating. Connectable under residual pressure in the Male half when coupled with a 3FFH Male coupling. Available sizes: 3/8", 1/2", 3/4", 1". Interchangeable according to ISO 16028.

### Accessories and spares






# 4BD4FH




Castings with cartridges for Construction Equipment. The first cast iron block ever designed to quickly connect and disconnect attachments on skid steers and other light equipment machines. Designed to connect the circuit with residual pressure on both ends. The decompression feature allows to connect the circuit with residual pressure on both ends. 1/2" and 3/4" cartridges can both fit into the 4BD4FH block. Higher flow capability is guaranteed when using 3/4" cartridges. Can be equipped with 4FFH or 4FSH cartridges. Cartridges share all the benefits of the FFH/FSH couplings technology.



## Easy to replace cartridges

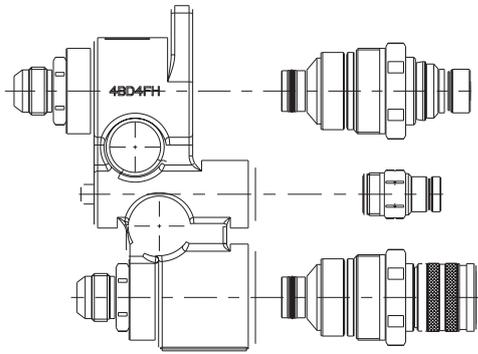

4BD4FH08

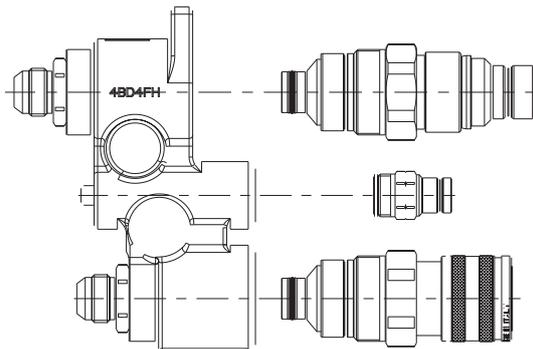

4BD4FH12



4FFH08 M



4FFH08 F



4FSH08 F



4FFH12 M



4FFH12 F

# MultiFaster



On [fastercouplings.com](http://fastercouplings.com) you can find the complete range of MultiFaster standard and G type. Below some insights.

## PB06



MultiFaster, 2 lines, size o6. Very compact design and dimensions. Working pressure: 25 MPa. Flow rate @ 0.2 MPa: 40 l/min.

### Accessories and spares



KIT3FN



KIT2FN



Seal kits

## P510



MultiFaster 4 lines. 2 lines size o8, 2 lines size 12. Working pressure: 25 MPa. Flow rate @ 0.2 MPa: 2 lines 70 l/min, 2 lines 105 l/min.

### Accessories and spares



KIT3FN



KIT2FN



Seal kits



## P608G



MultiFaster 6 lines, size o8, "G" type, with greaser and Zinc-Nickel plating. Working pressure: 25 MPa. Flow rate @ 0.2 MPa: 70 l/min.

### Accessories and spares



KIT3FN



KIT2FN



Seal kits

## P808G



MultiFaster 8 lines, size o8, "G" type, with greaser and Zinc-Nickel plating. Working pressure: 25 MPa. Flow rate @ 0.2 MPa: 70 l/min.

### Accessories and spares



KIT3FN



KIT2FN



Seal kits



---

# Industrial & Other Applications

---

Industrial applications are a wider area, which include several concepts. Products designed for industrial production are used in order to reduce downtime during maintenance operations. These products are generally characterized by different materials and different levels of performances, to match a broad variety of applications.

Faster offers also a wide range of products for several other applications, including Oil & Gas, Refrigeration, and High Pressure.



- ISO 7241-B
- FLAT FACE
- MULTIFASTER FOR INDUSTRIAL APPLICATIONS
- OIL & GAS
- BOP
- REFRIGERATION
- HIGH PRESSURE
- ULTRA HIGH PRESSURE
- MULTIFASTER FOR HIGH PRESSURE
- CHECK VALVES AND DIAGNOSTIC

# ISO 7241 - B




## HNV



Male and Female couplings for industrial applications with poppet valve shut-off system. Available sizes: 1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/2", 2". Complete range of sizes available with BSP, NPT and SAE Female threads. Interchangeable according to ISO 7241 Part B.

### Accessories and spares

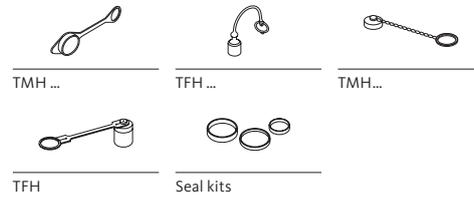


## HNV brass



Male and Female couplings for industrial applications with poppet valve shut-off system. Brass version available with NBR or Viton seals. Available sizes: 1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/2". Interchangeable according to ISO 7241 Part B.

### Accessories and spares

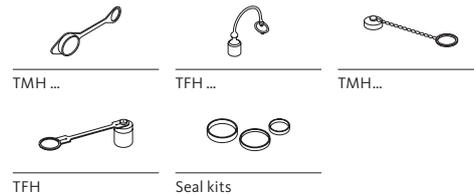


## HNV stainless steel



Male and Female couplings for industrial applications with poppet valve shut-off system. Stainless Steel version (AISI 316) with Viton seals. Available sizes: 1/4", 3/8", 1/2", 3/4", 1", 1-1/2", 2". Interchangeable according to ISO 7241 Part B.

### Accessories and spares

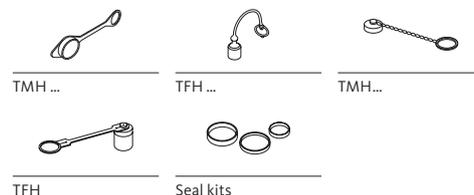

# Flat Face



## FFC



Flat Face Male and Female cartridge couplings in Stainless Steel (AISI 316) with Viton seals. Self-aligning couplings for MultiFaster. Misalignments up to  $\pm 0.5$  mm and  $\pm 1^\circ$  (angular) are automatically compensated during the connection. Available sizes: 1/4", 3/8", 1/2". Faster proprietary profile.

## 2FFI brass



Flat Face Male and Female couplings for industrial applications. Brass version with seals in Viton. Available in size 1/2". Interchangeable according to ISO 16028.

### Accessories and spares



TM 2FI ...



TF 2FI



TM 2FI ...



TF 2FI ...

## 2FFI stainless steel



Flat Face Male and Female couplings for industrial applications. Stainless Steel version (AISI 316) with Viton seals. Available sizes: 1/4", 3/8", 1/2", 3/4", 1".

### Accessories and spares



TM 2FI ...



TF 2FI



TM 2FI ...



TF 2FI...

# MultiFaster for Industrial Applications



On [fastercouplings.com](http://fastercouplings.com) you can find the complete range of MultiFaster for Industrial Applications. Below some insights.

## P10A



MultiFaster 10 lines. 5 lines size o8, 5 lines size o4. Working Pressure 25 MPa. Flow rate @ 0.2 MPa: 5 lines 70 l/min, 5 lines 20 l/min.

### Accessories and spares



KIT3FN



KIT2FN



Seal kits

## P1004



MultiFaster 10 lines, size o4. Working Pressure 25 MPa. Flow rate @ 0.2 MPa: 20 l/min.

### Accessories and spares



KIT3FN



KIT2FN



Seal kits

## P12A



MultiFaster 12lines. 10 lines size o8, 2 lines size o4. Working Pressure 25 MPa. Flow rate @ 0.2 MPa: 10 lines 70 l/min, 2 lines 20 l/min.

### Accessories and spares



KIT3FN



KIT2FN



Seal kits

# Oil & Gas



## OGV



Screw to Connect Male and Female couplings, suitable for Oil & Gas applications. Robust sleeve design, poppet valve and ACME connection thread. Connection under pressure: allowed residual in one of the two halves. Available sizes: 3/4", 1", 1-1/4", 1-1/2", 2".

### Accessories and spares



TM OGV ...



TF OGV ...

## TNV



Male and Female couplings, suitable for Oil & Gas applications. Poppet valve designed to help flow and allow connection with TNL parts (free flow) same series. Available sizes: 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2". Interchangeable with Faster TNL couplings.

### Accessories and spares



TMA .../TMH...



TFA .../TFH...



Seal kits

## TNL



Male and Female couplings, suitable for Oil & Gas applications. Free Flow couplings. Designed to maximize flow, assembled without internal valves. Available sizes: 1/4", 1/2", 3/4". Interchangeable with Faster TNV couplings. Available also in brass (sizes 1", 1-1/2").

### Accessories and spares



TMA .../TMH...



TFA .../TFH...

# BOP



## OGVFR



Screw to Connect Male and Female couplings, Lloyd's certified, suitable for Oil & Gas applications.

Robust sleeve design, poppet valve and ACME connection thread. Thanks to special components and seals, OGVFR couplings are API 16 D certified and suitable for BOP application. Connection under pressure: allowed residual in one of the two halves. Available sizes: 3/4", 1", 1-1/4".

### Accessories and spares



TM OGV ...



TF OGV ...

## FHVFR



Screw-to-Connect Flat Face couplings, Lloyd's certified, suitable for Oil & Gas applications. Equipped with a safety sleeve to help preventing accidental disconnections due to vibrations. Zinc-Nickel plating. Thanks to special components and seals, FHVFR couplings are API 16 D certified and suitable for BOP application. Connectable with residual pressure in the Male half up to 35 MPa. Available sizes: 3/4", 1". Faster proprietary profile.

### Accessories and spares



TM FHV ...



TF FHV ...

## HNVFR



Male and Female couplings with poppet valve shut-off system, Lloyd's certified, suitable for Oil & Gas applications. Thanks to special components and seals, HNVFR couplings are API 16 D certified and suitable for BOP application. Available sizes: 1/2", 3/4", 1". Interchangeable according to ISO 7241 Part B.

### Accessories and spares



TMH ...




TFH ...

# Refrigeration



## RF

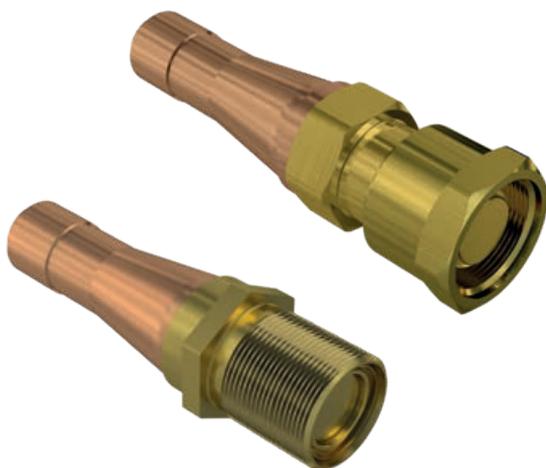

Screw to Connect Male and Female couplings, suitable for air conditioning and refrigeration applications. Available in several versions in steel, brass and with copper sweat braze adaptor. Connection under pressure: allowed residual in one of the two halves. Available sizes: 1/4", 3/8", 1/2", 3/4", 1".

### Accessories and spares



TMRF ...



TFRF

## RFL



Screw to Connect Female couplings for air conditioning and refrigeration applications. Equipped with a low friction sleeve, designed to reduce connection effort and friction. Connection under pressure: allowed residual in one of the two halves. Available sizes: 1/4", 3/8", 1/2", 3/4", 1". Interchangeable with Faster RF series.

### Accessories and spares



TMRF ...

## RFLS-RFS



Screw to Connect Male and Female couplings for air conditioning and refrigeration applications. Equipped with a low friction sleeve, to reduce connection effort, and an integrated safety sleeve, to prevent accidental disconnections. Connection under pressure: allowed residual in one of the two halves. Available sizes: 1/4", 3/8", 1/2", 3/4".

### Accessories and spares



TMRFLS ...



TRFS ...

# High Pressure



## PVVM



Screw to Connect Male and Female couplings, suitable for High Pressure applications. Equipped with a robust metal-to-metal sealing poppet valve. Maximum Working Pressure: 100 MPa. Connection under pressure: allowed residual in one of the two halves. Available sizes: 1/4", 3/8". Interchangeable according to ISO 14540.

### Accessories and spares



TMP...



TFP...



Seal kits

## PVSM



Screw to Connect Male and Female couplings, suitable for High Pressure applications. Equipped with a metal-to-metal sealing ball valve. Maximum Working Pressure: 72 MPa. Connection under pressure: allowed residual in one of the two halves. Available in size 3/8". Interchangeable according to ISO 14540.

### Accessories and spares



TMP...



TFP...



Seal kits

## FFHP



Flat Face Male and Female couplings, suitable for High Pressure applications. Flat valve shut-off system prevents contamination and spillage. Zinc-Nickel plating ensures good resistance to wear and corrosion. Maximum Working Pressure: 72 MPa. Available sizes: 1/4", 3/8".

# Ultra High Pressure



## UHP100



Male and Female couplings for Ultra High Pressure applications. Working pressures of 100 MPa. Very robust and reliable, equipped with safety sleeve. Characterized by redundant visual and mechanical safety systems. Available in size 1/4". Red caps provided as standard with the couplings.

### Accessories and spares



Dust Caps delivered with products

## UHP150



Male and Female couplings for Ultra High Pressure applications. Working pressures of 150 MPa. Very robust and reliable, equipped with safety sleeve. Characterized by redundant visual and mechanical safety systems. Available in size 1/4". Black caps provided as standard with the couplings.

### Accessories and spares




Dust Caps delivered with products

## Instruction for use




### Connection

Completely unscrew the safety sleeve (1), covering the green band. Retract the main sleeve (2), making visible the red band. Insert the male (3) and release the main sleeve. Screw the safety sleeve completely, till the green ring is visible (4).

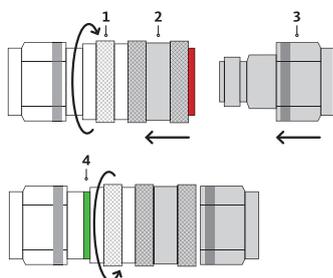


### Visual Check

Connection is safe and complete when the **red ring is not visible** while the **green ring is fully visible**. If not, verify and repeat all the connection steps.

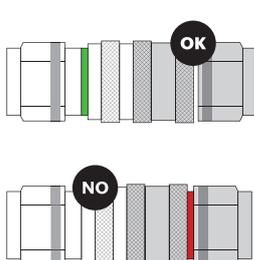

### Disconnection

Unscrew the safety sleeve (1). Pull back the main sleeve (2), the male coupler (3) will disengage automatically.

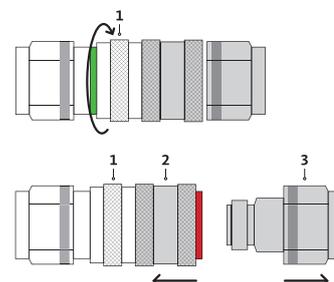

# MultiFaster for High Pressure



## PH406



MultiFaster for High Pressure applications.  
4 lines size o6. Working Pressure: 46 MPa.  
Flow rate @ 0.2 MPa: 35 l/min.

### Accessories and spares



KIT3FHP



KITFHB



Seal kits

## PH408



MultiFaster for High Pressure applications.  
4 lines size o8. Working Pressure: 46 MPa.  
Flow rate @ 0.2 MPa: 60 l/min.

### Accessories and spares



KIT3FHP



KITFHB



Seal kits

## PH510



MultiFaster 4 lines for High Pressure applications.  
2 lines size o8, 2 lines size 12.  
Working Pressure: 46 MPa.  
Flow rate @ 0.2 MPa: 2 lines 60 l/min, 2 lines 105 l/min.

### Accessories and spares



KIT3FHP



KITFHB



Seal kits

# Check Valves and diagnostic

## VU



Standard unidirectional check valves, acting as a safety device into hydraulic systems. Standard versions contain a spring set to open the valve at 35 kPa; Normally available with inlet and outlet Female threads. Available sizes: 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2". Wide range of calibrations available, from 10 to 950 kPa.

## VUC



Compact check valves, acting as a safety device into hydraulic systems. Very compact design, assembled with only one piece body. Standard cracking pressure 35 kPa. Available sizes: 1/4", 3/8", 1/2", 3/4", 1".

## DF



Diagnostic Flat Face Male and Female couplings, specifically designed to measure the internal pressure of hydraulic circuits. Male part to be mounted on the hydraulic line, Female part to be connected to gauge instruments. Available in size 1/4". Interchangeable according to ISO 15171-1.

### Accessories and spares



TFDF ...

**Headquarter: Faster Spa**

Via Ludovico Ariosto 7  
I-26027 Rivolta d'Adda CR Italy  
T +39 0363 377211 - F +39 0363 377333  
info@fastercouplings.com

**Germany: Faster Germany GmbH**

Ursulaweg 39 - 40764 Langenfeld  
T +49 (0) 2173 83924  
infoGermany@fastercouplings.com

**USA: Faster Inc**

6560 Weatherfield Court Maumee, OH - 43537, Usa  
T 800 231 2501 US/CANADA  
T 419 868 8197 OUTSIDE US  
F 419 868 8360  
infousa@fastercouplings.com

**Brazil: Faster do Brasil**

R. José Franklin de Moura, 25 - Independência, Taubaté - SP  
Cep 12031-290  
T +55 12 3026 9699  
infobrazil@fastercouplings.com

**China: Faster Hydraulics Co Ltd**

Rm 102, Bld 23, No. 588, Xin Jun Huan Rd. Pujiang Hi-Tech Park, 201114  
Shanghai P.R. China  
T +86 (0)21 6221 3086 - T +86 (0)21 6221 3218 - F +86 (0)21 6221 3113  
infochina@fastercouplings.com

**India: Faster Hydraulics Pvt Ltd**

Plot n°10, Gate N°108 Ambethan,  
Taluka Khed. District Pune, Maharastra - 410501 India  
T +91 2135678006  
infoindia@fastercouplings.com



We are the global reference  
in quick-release hydraulic couplings

**Faster Spa**  
Via Ludovico Ariosto, 7  
I-26027 Rivolta d'Adda  
Cremona, Italy  
T +39 0363 377211  
F +39 0363 377333  
info@fastercouplings.com  
www.fastercouplings.com